

ENGINE OILS

HiTEC[®] 2260

4-Stroke Motorcycle Additive Package



Value Your Bike

New Generation Future Proof Cascade Solution



HiTEC® 2260 4-Stroke Motorcycle Additive Package

Value Your Bike. New Generation Future Proof Cascade Solution

Key Performance Benefits

HiTEC® 2260 is our new generation future-proof cascade solution covering Mainstream, Premium, and Top Tier Motorcycle oils. HiTEC® 2260 delivers competitive treat-rates with a simple cascade covering API SP, API SN, and API SL licensable claims. It offers a solution with base oil flexibility in Group II and Group III and a range of viscosity grades from SAE 5W-30 to SAE 20W-50.

HiTEC® 2260 complies with JASO MA2 (T903:2016) requirements and matches the requirements of the expected future JASO specification.

HiTEC® 2260 additive package delivers the following benefits:

- Robust frictional characteristics associated with JASO MA2 (T903:2016) requirements
- Outstanding oxidation and deposit control as well as excellent wear performance

Recommended Dosage

For further information on HiTEC® 2260 API SP, API SN, and API SL treat-rates, contact your Afton Chemical representative.


Typical Characteristics

Appearance:	Dark Brown Liquid
Density at 15°C, g/ml:	0.987
Flash Point, °C (PMCC):	135 min.
Kinematic Viscosity at 100°C, mm ² /s:	126
Total Base Number, mg KOH/g:	116
Phosphorus, %wt:	1.07

Profile

HiTEC® 2260	SAE Viscosity Grades							
	5W-30	5W-40	10W-30	10W-40	15W-40	20W-40	20W-50	
API SP	●	●	●	●	●	●	●	
API SN	●	●	●	●	●	●	●	
API SL			●	●	●	●	●	

JASO T903:2016 Performance Chart

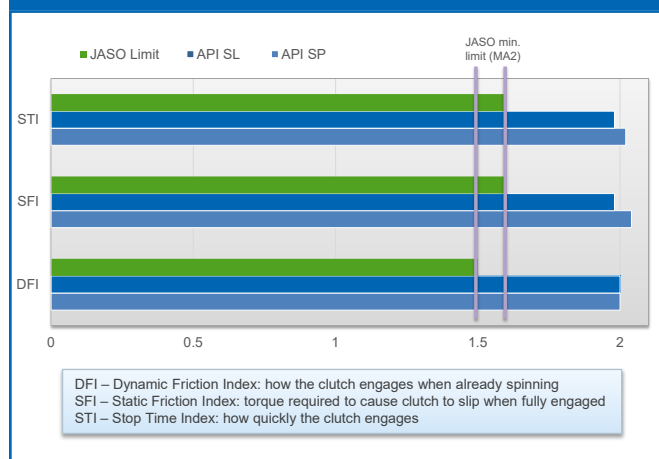

Handling Information

Max Handling Temp: 70 °C
Shelf Life: 24 months at ambient temperature