

ENGINE OILS

HiTEC[®] 12400

Heavy Duty Engine Oil Additive Package



Global Top Tier Performance for Reduced SAPS Applications
with Formulation Simplicity

HiTEC® 12400 Heavy Duty Engine Oil Additive Package

Global Top Tier Performance for Reduced SAPS Applications with Formulation Simplicity

Key Performance Benefits

HiTEC® 12400 additive is a truly Global product uniting top tier performance from Europe, The Americas and China. HiTEC® 12400 covers ACEA E8/E11, API CK-4 and associated OEMs at a low treat-rate of 16.1% wt. Providing operational flexibility to oil marketers as well as ensuring superior total cost of ownership for end users.

Delivering Value for Fleet Owners through Total Cost of Ownership Superiority

- Reduced unplanned downtime as engine parts are protected meaning less breakdown and ensuring a higher resale value
- Reduced planned downtime as longer drain interval possible with top tier specification
- Reduction in everyday running costs, delivered by strong fuel economy performance




Operational Flexibility and Efficiency

- Extensive range of global top tier OEM claims supported
- Choice of Group III coverage allowing for base oil flexibility
- Booster approach to cover full SAPS extended drain products
- OCP viscosity modifier allowing efficiency across Engine Oils portfolio

Typical Characteristics

Density at 15°C, g/ml:	0.951
Flash Point, °C (PMCC):	150
Kinematic Viscosity at 100°C, mm ² /s:	133
Total Base Number, mg KOH/g:	61

OEM Product Profile Coverage

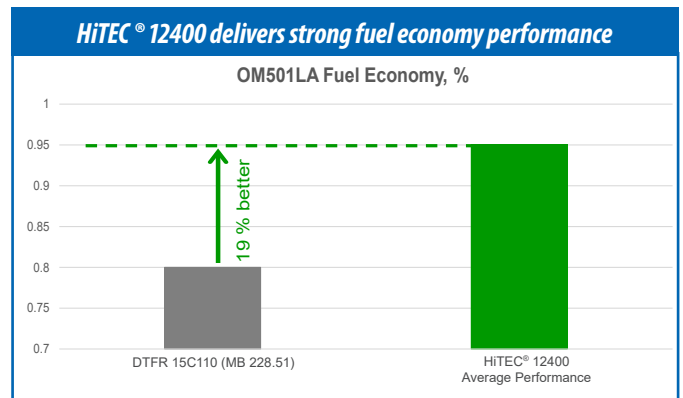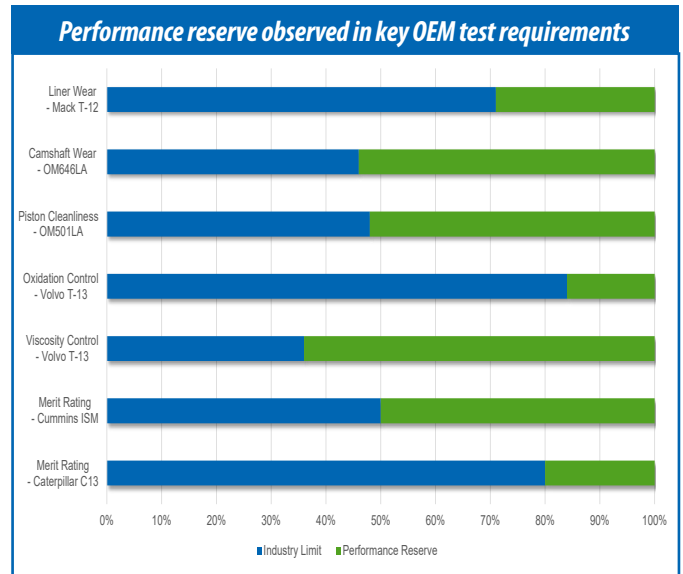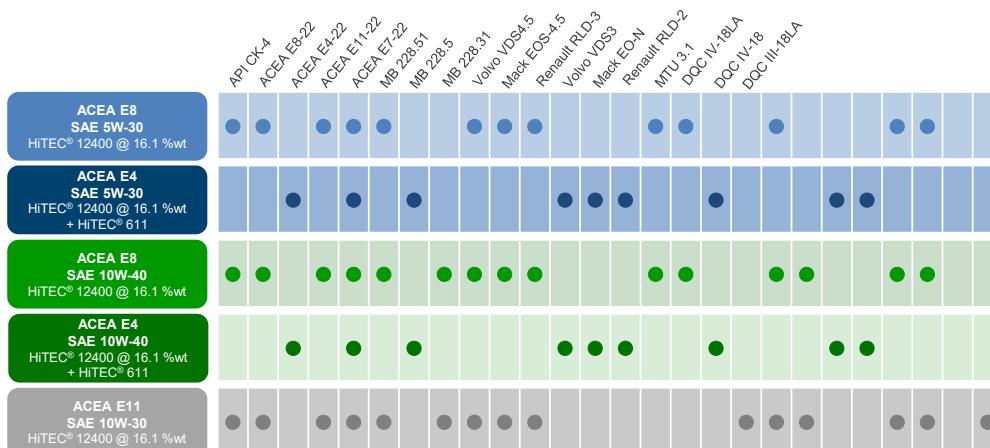

Handling Information

Max Handling Temp: 70°C

Shelf Life: 24 months at ambient temperature