

ENGINE OILS

HiTEC[®] 11500

Passenger Car Engine Oil Additive Package



Top Tier Reduced SAPS additive that provides outstanding sludge performance, LSPI and wear protection, without compromising on fuel economy

HiTEC® 11500 Passenger Car Engine Oil Additive Package

Top Tier Reduced SAPS additive that provides outstanding sludge performance, LSPI and wear protection, without compromising on fuel economy

Key Performance Benefits

HiTEC® 11500 is a Reduced SAPS additive package with a dedicated Daimler specification profile. Afton technology meets and exceeds MB 229.71QL, the latest specification released by Daimler, making it suitable for Daimler Genuine Oil as well as other final oils targeting the In-Warranty OEM Franchised Workshop passenger car market. Its profile also includes specifications with the highest share in the Daimler vehicle population in the next five years, making it an attractive solution for the Out-of-Warranty passenger car market. This technology also meets API SP. HiTEC® 11500 additive demonstrates excellent performance to support marketing claims:

- **Fuel Economy:** Meets and exceeds fuel economy requirements for MB 229.51, MB 229.52, MB 229.71 and ACEA C5-2023
- **Excellent Engine Durability:** HiTEC® 11500 delivers outstanding reserve performance in wear protection and sludge control, exceeding the MB 229.71QL limits
- **Excellent Engine Protection:** Minimises the potential LSPI events, offering 60% performance reserves for MB 229.51, MB 229.52, MB 229.71 and API SP

HiTEC® 11500 also provides a highly cost-competitive advantage. Afton leveraged its technical expertise using OCP viscosity modifiers to design an additive that meets MBQL quality specification requirements with minimal PAO content.

Recommended Dosage



Please contact your local Afton Chemical representative for treat-rate information.

Typical Characteristics

Appearance	Dark viscous liquid
Density @ 15°C, g/ml:	0.953
Flash Point, °C (PMCC):	135 min.
Kinematic Viscosity @ 100°C, mm ² /s:	173
Total Base Number, mg KOH/g:	62

Handling Information

Maximum Handling Temp: 70°C (less than 5 days)
Shelf Life @ ambient Temp (10-40°C): 24 months

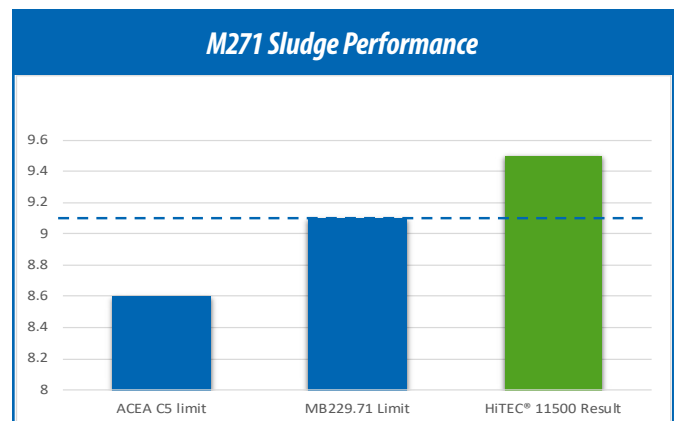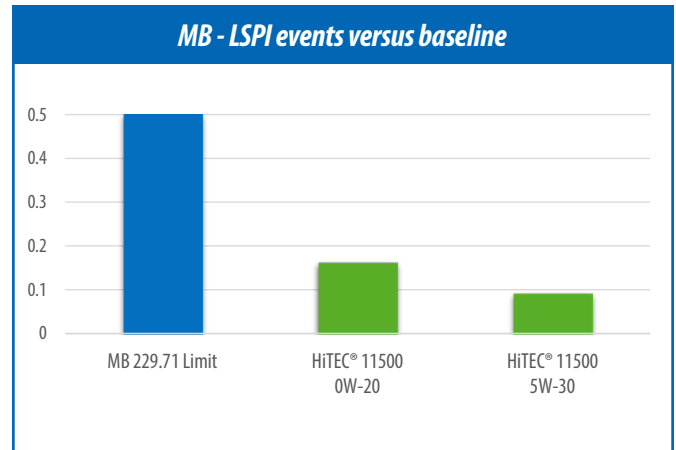

Profile

	ACEA C5-23	ACEA C3-23	ACEA C2-23	API SP	MB 229.31	MB 229.51 QL	MB 229.52 QL	MB 229.71 QL
SAE 0W-20	●			●				●
SAE 5W-20	●			●				●
SAE 5W-30		●	●	●	●	●	●	

Please contact your local Afton Chemical representative for the detail of the MB specification version.